


# Leica ScanStation P20

## Industry's Best Performing Ultra-High Speed Scanner

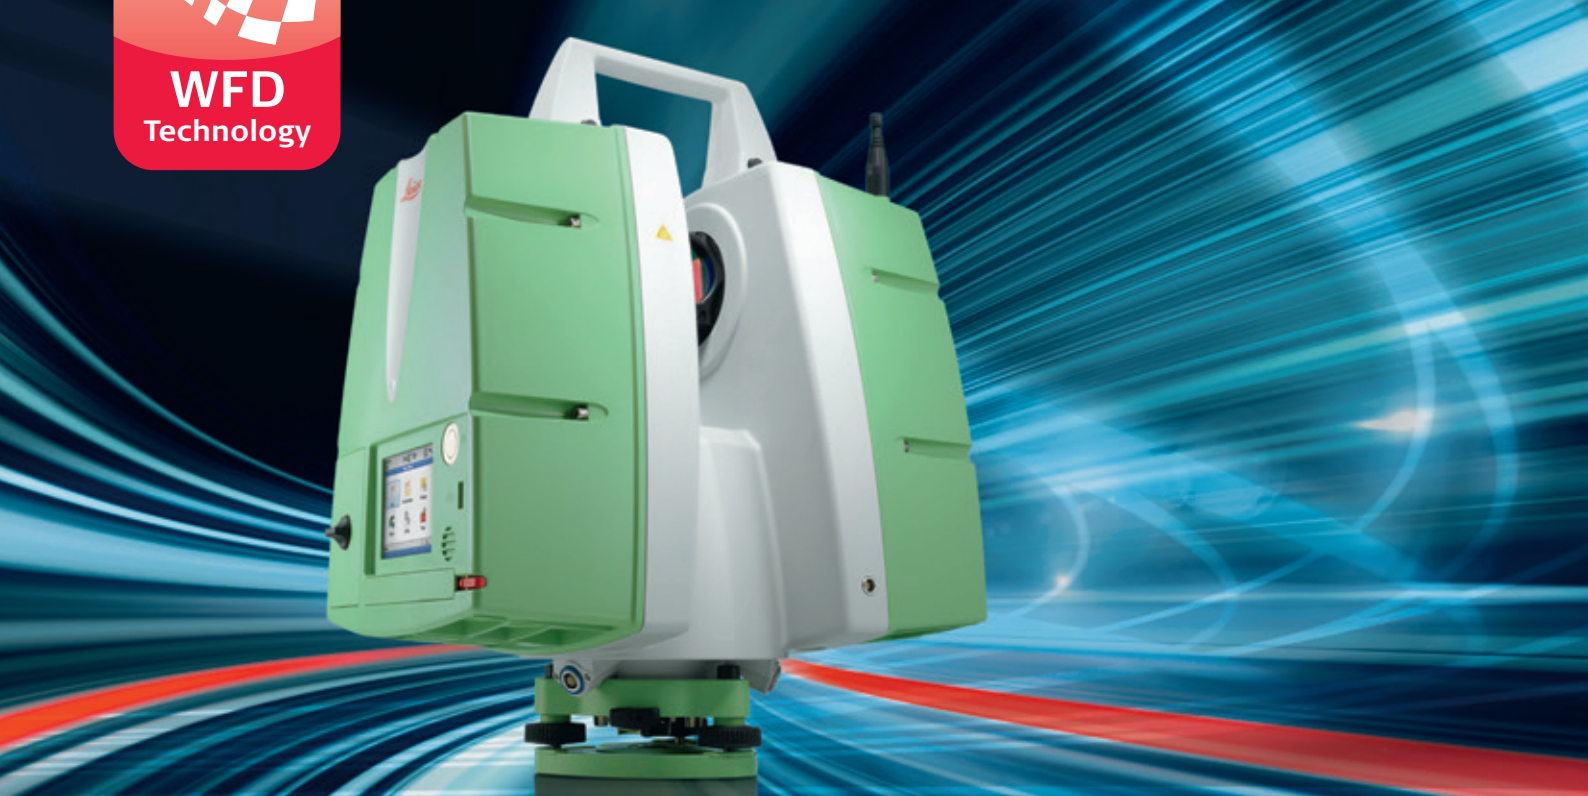

### Unprecedented performance in ultra-high speed laser scanning

#### Productivity & Accuracy

An innovative combination of advanced time-of-flight range measurement plus modern Waveform Digitising (WFD) technology enables the compact Leica ScanStation P20 to achieve ultra-high scan speeds and low-noise performance at extended range (to 120 m). Together with high-accuracy angular measurements and survey-grade tilt compensation, Leica ScanStation P20 delivers unprecedented ultra-high speed scan data quality for as-built and scene surveys.

#### Scan up to 1 million points per second

Leica ScanStation P20 is the ideal instrument when very short time windows are available for capturing High-Definition Survey™ data or when ultra-high density, full dome scan data is needed for client deliverables.

#### Unmatched environmental capabilities

Developed and manufactured by Leica Geosystems, Leica ScanStation P20 lets users apply ultra-high speed scanning in operating temperatures ranging from  $-20^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$ . Moreover, with an Ingress Protection rating of IP54 and an eye-safe laser class 1 rating, users can reap the benefits of ultra-high speed scanning for even more sites and projects.

#### "Check & Adjust" for added confidence

Leica ScanStation P20 is the first laser scanner to feature a valuable "Check & Adjust" capability. Instead of sending the instrument to a service centre, users can electronically check the accuracy of their ScanStation P20 themselves and automatically adjust instrument parameters to ensure the highest level of performance.

# Leica ScanStation P20

## Product Specifications

General	
<b>Instrument type</b>	Compact, ultra-high speed pulsed laser scanner with survey grade accuracy, range and field-of-view; integrated camera and laser plummet
<b>User interface</b>	Onboard control, notebook or tablet PC, PDA
<b>Data storage</b>	Integrated solid-state drive (SSD) or external USB flash drive
<b>Camera</b>	Auto-adjusting, integrated high-resolution digital camera with zoom video

System Performance	
<b>Accuracy of single measurement</b>	3D Position Accuracy Linearity error Angular accuracy
	3 mm at 50 m; 6 mm at 100 m ≤ 1 mm 8" horizontal; 8" vertical
<b>Target acquisition*</b>	2 mm standard deviation up to 50 m
<b>Dual-axis compensator</b>	Selectable on/off, resolution 1", dynamic range +/- 5', accuracy 1.5"

Laser Scanning and Imaging System																																													
<b>Type</b>	Ultra-high speed time-of-flight enhanced by Waveform Digitising (WFD) technology																																												
<b>Wavelength</b>	808 nm (invisible) / 658 (visible)																																												
<b>Laser class</b>	1 (in accordance with IEC60825:2014)																																												
<b>Beam divergence</b>	0.2mrad																																												
<b>Beam diameter at front window</b>	≤ 2.8 mm																																												
<b>Range</b>	Up to 120 m; 18% reflectivity (minimum range 0.4 m)																																												
<b>Scan rate</b>	Up to 1'000'000 points/s																																												
<b>Range noise**</b>	<table border="1"> <thead> <tr> <th>Range</th> <th>Black (10%)</th> <th>Gray (28%)</th> <th>White (100%)</th> </tr> </thead> <tbody> <tr> <td>10 m</td> <td>0.8 mm rms</td> <td>0.5 mm rms</td> <td>0.4 mm rms</td> </tr> <tr> <td>25 m</td> <td>1.0 mm rms</td> <td>0.6 mm rms</td> <td>0.5 mm rms</td> </tr> <tr> <td>50 m</td> <td>2.8 mm rms</td> <td>1.1 mm rms</td> <td>0.7 mm rms</td> </tr> <tr> <td>100 m</td> <td>9.0 mm rms</td> <td>4.3 mm rms</td> <td>1.5 mm rms</td> </tr> </tbody> </table>	Range	Black (10%)	Gray (28%)	White (100%)	10 m	0.8 mm rms	0.5 mm rms	0.4 mm rms	25 m	1.0 mm rms	0.6 mm rms	0.5 mm rms	50 m	2.8 mm rms	1.1 mm rms	0.7 mm rms	100 m	9.0 mm rms	4.3 mm rms	1.5 mm rms																								
Range	Black (10%)	Gray (28%)	White (100%)																																										
10 m	0.8 mm rms	0.5 mm rms	0.4 mm rms																																										
25 m	1.0 mm rms	0.6 mm rms	0.5 mm rms																																										
50 m	2.8 mm rms	1.1 mm rms	0.7 mm rms																																										
100 m	9.0 mm rms	4.3 mm rms	1.5 mm rms																																										
<b>Scan time and resolution (hh:mm:ss)</b>	<table border="1"> <thead> <tr> <th rowspan="2">7 pre-set point spacings (mm at 10 m)</th> <th colspan="4">Quality level</th> </tr> <tr> <th>1</th> <th>2</th> <th>3</th> <th>4</th> </tr> </thead> <tbody> <tr> <td>50</td> <td>00:20</td> <td>00:20</td> <td>00:28</td> <td>----</td> </tr> <tr> <td>25</td> <td>00:33</td> <td>00:33</td> <td>00:53</td> <td>01:43</td> </tr> <tr> <td>12.5</td> <td>00:58</td> <td>01:44</td> <td>03:24</td> <td>06:46</td> </tr> <tr> <td>6.3</td> <td>01:49</td> <td>03:25</td> <td>06:46</td> <td>13:30</td> </tr> <tr> <td>3.1</td> <td>03:30</td> <td>06:47</td> <td>13:30</td> <td>26:59</td> </tr> <tr> <td>1.6</td> <td>13:33</td> <td>27:04</td> <td>54:07</td> <td>----</td> </tr> <tr> <td>0.8</td> <td>54:07</td> <td>1:48:13</td> <td>----</td> <td>----</td> </tr> </tbody> </table>	7 pre-set point spacings (mm at 10 m)	Quality level				1	2	3	4	50	00:20	00:20	00:28	----	25	00:33	00:33	00:53	01:43	12.5	00:58	01:44	03:24	06:46	6.3	01:49	03:25	06:46	13:30	3.1	03:30	06:47	13:30	26:59	1.6	13:33	27:04	54:07	----	0.8	54:07	1:48:13	----	----
7 pre-set point spacings (mm at 10 m)	Quality level																																												
	1	2	3	4																																									
50	00:20	00:20	00:28	----																																									
25	00:33	00:33	00:53	01:43																																									
12.5	00:58	01:44	03:24	06:46																																									
6.3	01:49	03:25	06:46	13:30																																									
3.1	03:30	06:47	13:30	26:59																																									
1.6	13:33	27:04	54:07	----																																									
0.8	54:07	1:48:13	----	----																																									
<b>Field-of-View</b>	Horizontal Vertical																																												
	360° 270°																																												
<b>Aiming/Sighting</b>	Parallax-free, integrated zoom video																																												
<b>Scanning optics</b>	Vertically rotating mirror on horizontally rotating base Up to 50 Hz with internal battery Up to 100 Hz with external power supply																																												
<b>Data storage capacity</b>	256 GB onboard solid-state drive (SSD) or external USB device																																												
<b>Communications</b>	Gigabit Ethernet or integrated Wireless LAN																																												
<b>Imaging</b>	5 megapixels per each 17° x 17° colour image; streaming video with zoom; auto-adjusts to ambient lighting																																												
<b>Onboard display</b>	Touchscreen control with stylus, full colour VGA graphic display (640 x 480 pixels)																																												
<b>Level indicator</b>	External bubble, electronic bubble in onboard software																																												
<b>Data transfer</b>	Ethernet, WLAN or USB 2.0 device																																												
<b>Laser plummet</b>	Laser class 1 (IEC60825:2014) Centering accuracy: 1.5 mm at 1.5 m Laser dot diameter: 2.5 mm at 1.5 m Selectable ON/OFF																																												

Electrical	
<b>Power supply</b>	24 V DC, 100 – 240 V AC
<b>Power consumption</b>	40 W typical
<b>Battery type</b>	Internal: Li-Ion; External: Li-Ion
<b>Power ports</b>	Internal: 2, External: 1 (simultaneous use, hot swappable)
<b>Duration</b>	Internal > 7 h (2 batteries), External > 8.5 h (room temp.)

Environmental	
<b>Operating temperature</b>	-20° C to +50° C / -4° F to 122° F
<b>Storage temperature</b>	-40° C to +70° C / -40° F to 158° F
<b>Lighting</b>	Fully operational between bright sunlight and complete darkness
<b>Humidity</b>	Non-condensing
<b>Dust/Humidity</b>	IP54 (IEC 60529)

Physical	
<b>Scanner</b>	Dimensions (D x W x H) Weight
	238 mm x 358 mm x 395 mm / 9.4" x 14.1" x 15.6" 11.9 kg / 26.2 lbs, nominal (w/o batteries)
<b>Battery (internal)</b>	Dimensions (D x W x H) Weight
	40 mm x 72 mm x 77 mm / 1.6" x 2.8" x 3.0" 0.4 kg / 0.9 lbs
<b>Battery (external)</b>	Dimensions (D x W x H) Weight
	95 mm x 248 mm x 60 mm / 3.7" x 9.8" x 2.4" 1.9 kg / 4.2 lbs
<b>AC Power Supply</b>	Dimensions (D x W x H) Weight
	170 mm x 85 mm x 42.5 mm / 6.6" x 3.3" x 1.6" 0.86 kg / 1.9 lbs
<b>Mounting</b>	Upright or upside down

Standard Accessories Included	
Scanner transport case	
Tribrach (Leica Geosystems Professional Series)	
4 x Internal batteries	
Battery charger / AC power cable, car adapter, daisy chain cable	
Data cable	
Height metre and distance holder for height metre	
1 year CCP Basic support contract	

Additional Accessories & Services	
B&W scan targets and target accessories	
Range of Customer Care Products (CCPs) that include Support, Hardware & Software maintenance and Extended warranty.	
External battery with charging station, AC power supply and power cable	
Professional charger for internal batteries	
AC power supply for scanner	
Tripod and tripod star	
Upside down mounting adapter	

Control Options	
Full colour touchscreen for onboard scan control.	
Remote control: Leica CS10/CS15 controller or any other remote desktop capable device, including iPad, iPhone and other Smartphones.	

Ordering Information	
Contact your local Leica Geosystems representative or an authorised Leica Geosystems dealer.	

All specifications are subject to change without notice.  
All accuracy specifications are one sigma unless otherwise noted.  
\* Algorithmic fit to planar B&W targets  
\*\* Detailed explanation on request

Scanner: Laser class 1 in accordance with IEC60825:2014  
Laser plummet: Laser class 1 in accordance with IEC60825:2014

iPhone and iPad are trademarks of Apple Inc.

Illustrations, descriptions and technical data are not binding. All rights reserved. Printed in Switzerland - Copyright Leica Geosystems AG, Heerbrugg, Switzerland, 2013. 795781en - 07.14 - galledia

